

## UP---.0700

- Higher wear-resistance
- Fine grained structure
- Easy to weld
- Special machining on request
- Max length in one piece 12 m

Versions of delivery:

Standard UP---.0700

Fine straightened style  $\pm 0,3$  mm/m UP---.0701

Sandblasted UP---.0702

Sandblasted + fine straightened style UP---.0703



Ordering example: UP 070.0700-2800

U-Profile with inside measurement 70,8 mm, length 2800 mm

Dimensions in mm.


**Material:** 18MnNb 6 with plenty more load capacity by addition of Niob (Nb) and vanadium (V)

**Sizes Available:** 60; 70; 80; 90; 110; 120; 150; 180

## General Data

Designation	Weight (kg/m)
UP060.0700	10.50
UP070.0700	14.80
UP080.0700	20.90
UP090.0700	28.60
UP110.0700	36.00
UP120.0700	42.80
UP150.0700	52.30
UP180.0700	78.51

## Dimensions

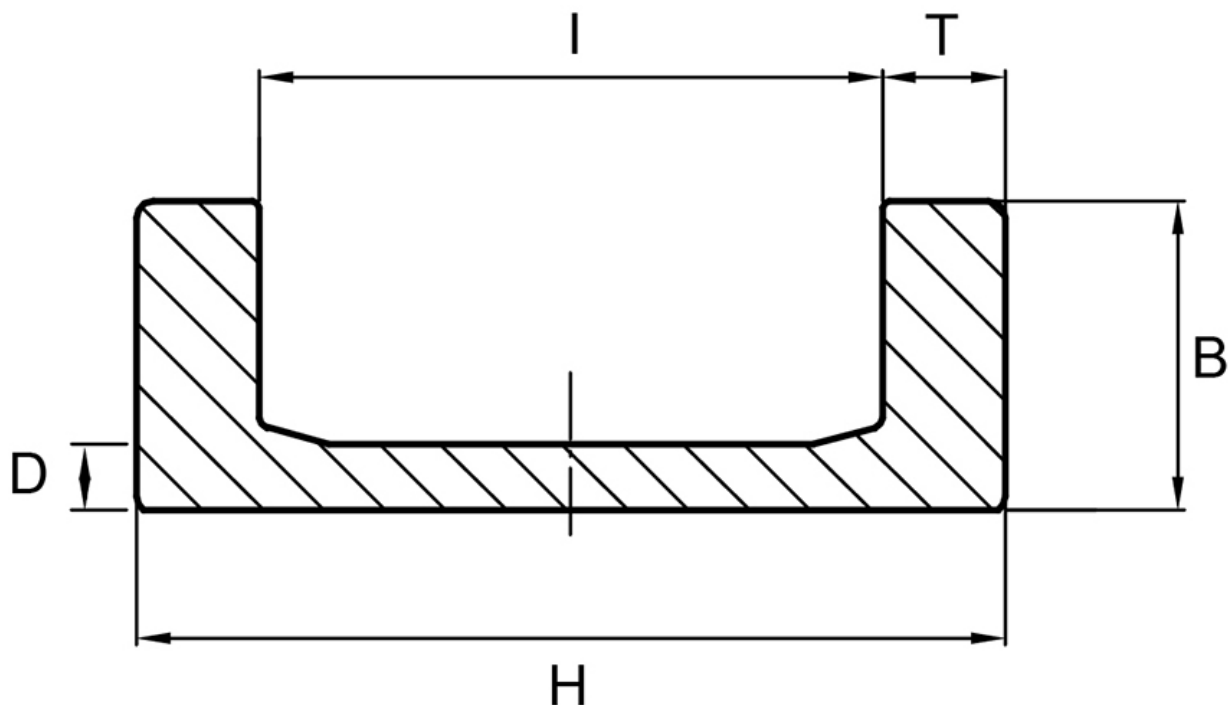

Designation	B	D	H	I	T
UP060.0700	36	7 ±0.5	86.5	62.7 +0.8	12 ±0.5
UP070.0700	40 ±0.8	7.7 ±0.5	103.2	70.8 ±0.5	16.2 ±0.5
UP080.0700	41 ±0.5	10.8 ±0.5	121.3	78.7 ±0.5	21.2 ±0.5
UP090.0700	53 ±0.5	12.7 ±0.5	135.4	89.4 ±0.5	23 ±0.5
UP110.0700	61.2 ±0.8	14 ±0.5	157.2	108.4 ±0.5	24.4 ±0.5
UP120.0700	66.2 ±0.8	16.2 ±0.5	175	123.8 ±0.5	25.6 ±0.5
UP150.0700	71.2 ±0.8	19.4 ±0.5	201.5	150.1 ±0.5	25.7 ±0.5
UP180.0700	90 ±0.6	19.4 ±0.5	252.5	181.1 ±0.6	35.7 ±0.6